

Rosink, cot grinding specialist

Surface Tester RST 2

- > service machine for the cot maintenance workshop
- > for checking surface roughness of top rollers
- > an intelligent solution for the roller workshop
- > made in Germany



- SZ1 A TWIN
- SZ1 A
- SZ1 A+HA / SZ1 A TWIN+HA
- SZ2 HA
- Cot Mounting AZ 11 H
- Cot Mounting RCM-P
- Cot Tester RCT
- > **Surface Tester RST 2**

Rosink


Surface Tester RST 2

Application

The Surface Tester RST 2 can be used for checking surface roughness parameters of covers of top rollers.

Advantages

- > Display of surface parameters Ra, Rq, Ry and Rz in accordance to ISO/DIN/ANSI/JIS.
- > Wide measurement range as from -200 μm to +150 μm .
- > 10 readings are memorized.
- > A/C-connection or by built-in rechargeable battery.
- > Printer as special attachment (optional).

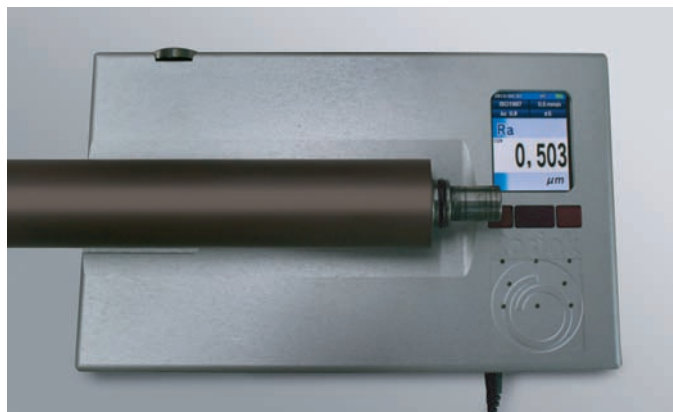

Hardness Tester RHP

Rosink hardness tester RHP to determine and to check the shore hardness of the rubber cot (Shore A).

- > Indication as from 0-100 Shore A
- > Recording hand sets shore hardness.

